

CONDENSER MICROPHONE LC-28


Art. no. 1114

- **Cardioid**
- **Transformerless**
- **300 Hz high pass filter**
- **-10/-20 dB pre-attenuation**
- **48 V phantom**


Frequency response (see graph)	40-20000 Hz
Polar pattern	Cardioid
Filter (switchable)	300 Hz high pass
Pre-attenuation (switchable)	-10/-20 dB
Maximum SPL for 0.5 % THD at 1 kHz (position: 0)	130 dB
A-weighted noise level (acc. to IEC 179-A)	20 dB
Sensitivity at 1 kHz and 1 kohm load	10 mV/Pa ± 1 dB
Output impedance	170 ohms
Minimum load impedance	1 kohm
Power supply	48 V ± 4 V phantom
Current consumption	35 mA
Net weight	320 g
Length	185 mm
Diameter	27/50 mm

Frequency response

The frequency response may vary within ± 2.5 dB of the published graph.
Before delivery, each microphone is measured and the individual graph supplied.

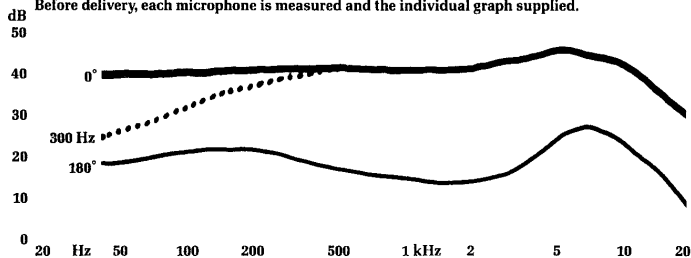

Polar diagram

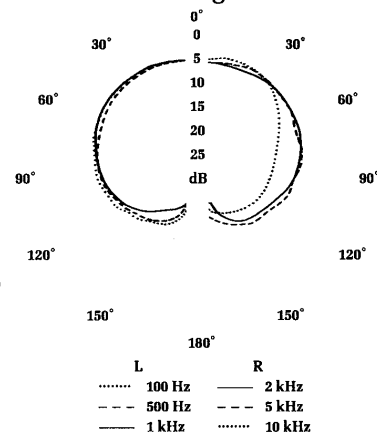

Accessories



Windscreens (3402)



Shockmount (3224)



Stand adapter (3124)