

### VM44 System

With discreet design and outstanding clarity, it will satisfy the most demanding situations. For studio and PA applications.



*Handmade in Sweden  
with lifetime warranty*

With discreet design and outstanding clarity, it will satisfy the most demanding situations. For studio and PA applications.

- **Cardioid (std)**
- **Interchangeable capsules**
- **Transformerless**
- **-12 dB pre-attenuation**
- **12 - 52 V phantom**
- **XLR-Amp fits direct to mixer.**

Frequency response ( see graph )	20 - 20 000 Hz
Polar pattern	Cardioid
Pre-attenuation ( switchable )	-12 dB
Max. SPL ( 1% THD at 1 kHz)	128 / 140 dB
Sensitivity at 1kHz	14,5 mV / Pa ± 1 dB
A-weighted noise level	21 dB
Power supply ( DIN 45 596 )	12 - 52 V
Current consumption	4 mA
Output impedance	< 200 Ω
Minimum load impedance	1 kΩ
Link cable length	3 m
Connection	3-pin XLR pin 1: earth ( Shield ) pin 2: plus ( Hot ) pin 3: minus ( Cold )




XLR-Amp


	<i>Active Cap. XLR-amp.</i>
Net weight	50 g      85 g
Length	49 mm 105 mm
Diameter	21 mm 19 mm

### Frequency response (at 1m distance)

The frequency response may vary within ± 2,5 dB of the published graph. Before delivery, each microphone is measured and accompanied with it's own graph.

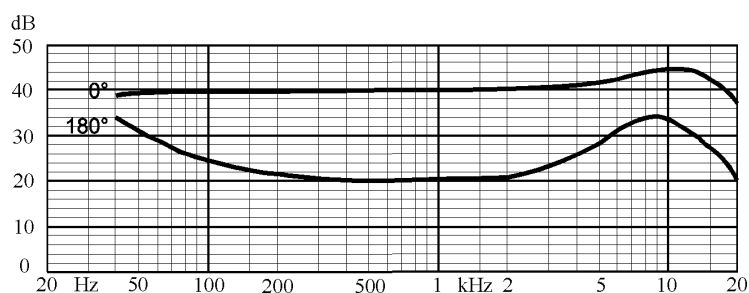

### Polar diagram

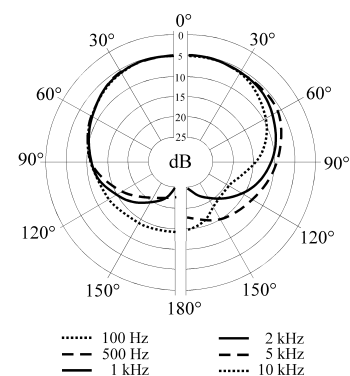

## Milab Microphones AB

Mailing address  
P. O. Box 1342  
S-251 13 HELSINGBORG  
SWEDEN

Office address  
Norra Strandgatan 4

Phone  
+46 42 381620

Fax  
+46 42 136350

E-mail  
milab@milabmic.com  
Internet  
www.milabmic.com