

Typ C-2

**KONDENSATORMIKROFON**

Denna mikrofon är av högsta professionella klass och förenar extremt låg brusnivå med hög känslighet och mycket markant riktverkan.

**TEKNISKA DATA:**

Rikt diagram	Kardioid
Riktverkan	15 - 20 dB
Frekvensområde	30 - 18000 Hz
Känslighet	-56 dB/200 ohm
Utgångsimpedans	200 ohm
Glödspänning	4 volt 0,1 amp
Förstärkarrör	AC 701 K
Signal-brusförh. vid 2000 Hz	65 dB
Brusnivå	14 phon
Temperaturområde	- 40° + 70° C
Dimensioner	135 x 23 mm
Vikt	140 gr
Ytbehandling	matt krom
Anslutningskontakt	6 - 11 c



**CONDENSER MICROPHONE**

This microphone is of the highest professional class and combines an extremely low noise level with a high sensitivity and a pronounced directivity.

**TECHNICAL DATA:**

Directivity pattern	Cardioid
Directivity index	15 - 20 dB
Frequency response	30 - 18000 cps
Sensitivity	-56 dB/200 ohms
Output impedance	200 ohms
Heater voltage	4 volts 0,1 amps
Amplifier tube	AC 701 K
Signal-to-noise ratio at 2000 cps	65 dB
Noise level	14 phons
Operating temperature	- 40° + 70° C
Dimensions	5 1/2" x 29/32"
Weight	140 gr
Finish	dull chromium
Connector	6 - 11 - c

Typ/Type	Beskrivning/Description
C-2	Kondensatormikrofon/Condenser microphone
1906-K	Svanhals monterad med 6 m 5-led. kabel och kontakt/Goose-neck with 20 ft. microphone cable
3006	6 m 5-led. mikrofonkabel med kontakter/20 ft. microphone cable, 5 cond., with connectors 6 - 11 - c
3002	6 m 2-led. signalkabel med kontakter/Signal cable 20 ft. 2 cond. with connectors
3000	Nätaggregat/Power supply
C-2 T	Kondensatormikrofon med Tuchelkontakt 6 pol./Condenser microphone with Tuchel connector, 6 p.

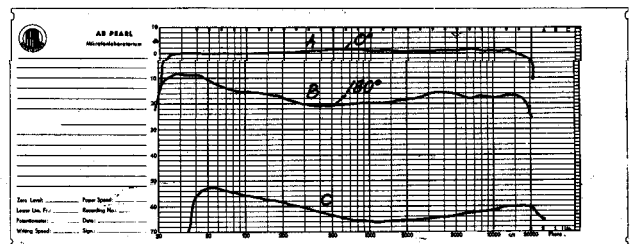

Frequency response curves: A = 0° B = 180° C = Noise level