

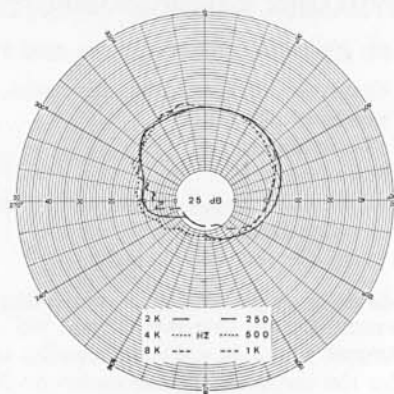


TECHNICAL DATA

Directivity pattern	Cardioid
Directivity index	10—15 dB
Frequency response	60—18,000 Hz
Sensitivity (over 200 ohms re. 1 V)	—54 dB/Pa
Output (over 200 ohms re. 1 V)	2.0 mV/Pa
Output impedance (balanced)	200 ohms
Dimensions (front)	195 x $\frac{32}{24}$ mm
(handle)	
Weight	175 gr
Finish	Blasted dark-grey

Accessories and description	Type	Included	Optional
Dynamic cardioid microphone, 200 ohms	F-69		
Microphone cable	3003	X	
Stand adapter ($\frac{5}{8}$ " x 27 TPI)	1930/24	X	
Shockproof mount ($\frac{5}{8}$ " x 27 TPI)	1910/24		X
Gooseneck — see page "GOOSENECKS"	1903		X
Windscreen	V-34		X
Carrying case	1073		X
Cardboard box		X	

Typical frequency response curve of F-69

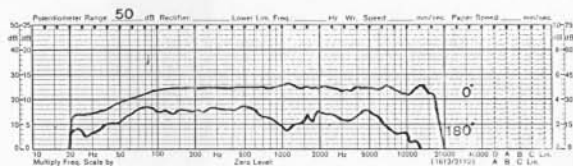

Wiring-instruction