


## Pearl MM 54-XLR & Pearl MM 54-3/8" Dynamic Cardioid Microphone

The Pearl MM 54 is identical to the MM 50 but with a gooseneck attached. The connection at the end of the gooseneck is either a 3-pin XLR-connector or a 3/8" stand thread.

### Specification

Polar pattern: Cardioid  
Sensitivity: -75 dB  
Frequency Range: 90 Hz - 12 kHz  
Impedance: 600 ohms  
Connector: 3-pin XLR (only MM 54-XLR)  
Dimension: Length 380 mm x Ø28 mm  
(lengths can be customer specified)  
Weight: 200 grams  
Stand thread: 3/8" (only MM 54-3/8")  
Cable: 10 metres /3-pin XLR  
(only MM 54-3/8")

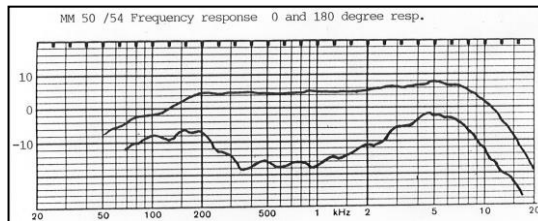

RoHS Compliant  
Directive 2002/95/EC