


## DYNAMIC MICROPHONE P-14



**Milab<sup>®</sup>**  
**Dynamic microphone P-14**  
 PA or vocal supercardioid mike

**T**he P-14 supercardioid dynamic microphone combines high output level, wide frequency range and light weight. It is specially designed for hand-held vocals where

- Full frequency range supercardioid dynamic.
- Steel mesh protective grill.
- Machined solid case.
- Rubber and foam insulated system.

Two standard models.

- P-14 has 5 meter fixed cable terminating in 6.3 mm phone plug as well as on-off switch on the case.
- P-14 C has a 3-pin male connector of XLR type at the base and no switch.

**Features:**  
 the dynamic system and its protective grill is rubber insulated to reduce mechanical noise. Plosive sounds and wind noise are also minimized by a built-in foam windscreen.

**Description:**  
 Special models on request.

- P-14 5/4 has an on-off push switch with automatic return and remote control wire. It has 4 meter 5-conductor fixed cable terminating in 5-pin DIN 180° stereo male connector.
- P-14 4/10 has an on-off slide switch with remote control wire. It has 10 meter 3-conductor fixed cable terminating in 5-pin DIN 180° stereo male connector.
- P-14 SPECIAL. Designed according to your needs.

**Applications:**  
 All-around microphone for hand held vocals or in public address systems and applications where a remote controlled cardioid microphone is needed. Recommended for close to medium distance pick-up for studio, broadcast, live performance or PA systems.



## DYNAMIC MICROPHONE P-14

### Technical data:


Directional pattern	Cardioid
Operating principle	Dynamic moving coil
Directivity index	10-12 dB
Frequency response	100-14.000 Hz
Sensitivity at KHz (over 200 ohms re. 1 V.)	-54 dB/Pa
Output at 1 KHz (over 200 ohms re. 1 V.)	2.0 mV/Pa
Output impedance (balanced)	200 ohms
Connection	See description
Dimensions in millimeters	170 long 27/50 diam.
Weight in grams	160
Finish	Satin Black

### Accessories:


Accessories and description	Type	Incl.	Opt.
Microphone cable (only C version)	3003 C		●
Stand adaptor (5/8" x 27 TPI-3/8")	1930/27	●	
Shockmount (5/8" x 27 TPI-3/8")	1910/27		●
Windscreen (black)	V-25	●	
Windscreen Colored (red, yellow, blue, green)	VR-25, VY-25 VB-25, VG-25		●
Cardboard box		●	

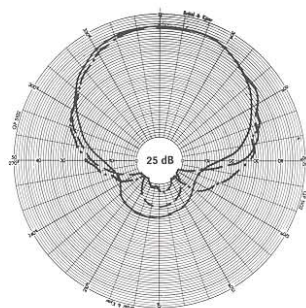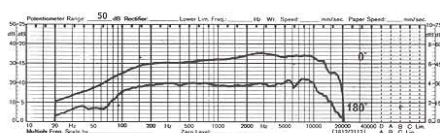


Hz  
100-1000 ————  
2000-8000 - - - -  
12000 ————

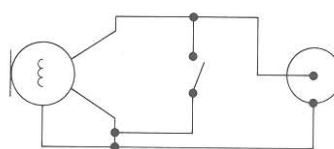


P-14

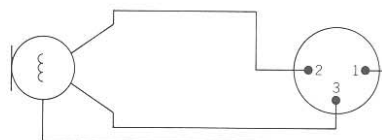


P-14 C

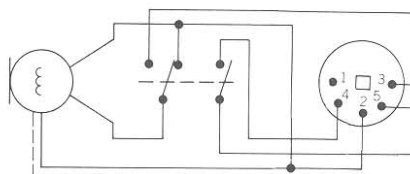

P-14 5/4

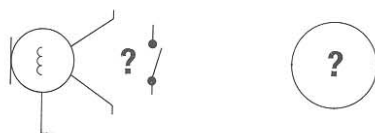

P-14 SPECIAL

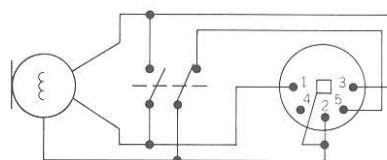

P-14 4/10

We reserve the right to alter specifications without notice.

creative trade ctab ab  
**ctab**®

Address  
Knutsgatan 6  
S-265 00 Åstorp, Sweden

Phone  
Int +46 42/515 21 - 597 56  
Nat 042-515 21 - 597 56

Cables  
Cetab  
Helsingborg

Telex  
72780 Milab S

**Milab Microphones AB**

Norra Strandgatan 4

P.O Box 1342

S-25113 Helsingborg, Sweden

**Telephone**

Office + 46 42 38 16 20

Telefax

Office + 46 42 13 63 50