

Hand held

Dynamic microphone insensitive to feedback as well as hand noise, perfect for live performances. Fantastic sound quality for vocals, drums and amplifiers



*Handmade in Sweden
with lifetime warranty*

D-37 Dynamic Microphone

Art.No 1208

Do you find condenser microphones too sensitive, or phantom power supplies awkward?
And still haven't found a dynamic alternative that really suits you?

Milab has developed a dynamic microphone, the D-37, just for you. It is insensitive to feedback as well as hand noise and thus perfect for live performances.

From the first time you try it, you will hear a sound quality you thought impossible with a dynamic mike. Fantastic sound quality for vocals, drums and amplifiers.


- **Cardioid**
- **Insensitive to hand noise**
- **Built-in pop protection**
- **20 dB back rejection**

Frequency response (see graph)	50 - 20 000 Hz
Polar pattern	Cardioid
Sensitivity at 1kHz	1.3 mV / Pa \pm 2 dB
Output impedance	250 Ω
Minimum load impedance	1 k Ω
Connection	3-pin XLR pin 1: earth (Shield) pin 2: plus (Hot) pin 3: minus (Cold)
Net weight	290 g
Length	190 mm
Diameter	24 / 48 mm




Frequency response (at 1m distance)

The frequency response may vary within $\pm 2,5$ dB of the published graph.

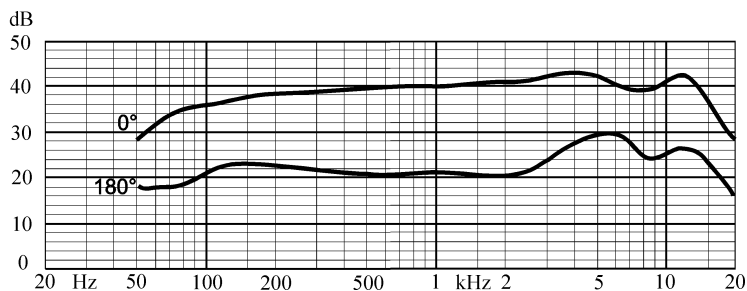

Polar diagram

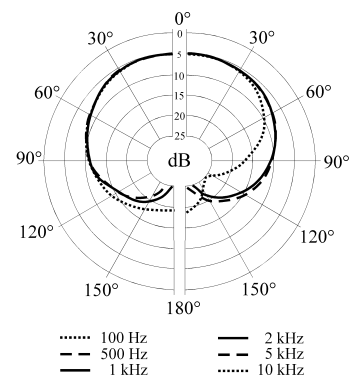

Milab Microphones AB

Mailing address
P. O. Box 1342
S-251 13 HELSINGBORG
SWEDEN

Office address
Norra Strandgatan 4

Phone
+46 42 381620

Fax
+46 42 136350

E-mail
milab@milabmic.com
Internet
www.milabmic.com